

VR5 SERIES HEAVY DUTY ELECTRIC GRIDDLE TOP RANGE



- VR5** Standard Oven
- VR5C** Convection Oven

STANDARD FEATURES

- Stainless steel front, sides, stub back and front top ledge.
- 6" adjustable stainless steel legs.
- 36"w x 24"d, 1/2" thick polished steel griddle plate.
- Thermostat control with cycling light for each 12"w x 24"d section. Thermostat adjusts from 175° to 550°F.
- Porcelain on steel baffled grease drawer and warming drawer under range top.
- 2 1/2" fiberglass insulation in sides, top, back and bottom. 2" in door.
- Requires 208V or 240V, 60 Hz, 1 or 3 phase power supply.
- **Standard oven (VR5):** 6.7 KW input. Top and bottom solid sheath heating elements with independent element controls. One oven rack with two rack positions. Thermostat with cycling light adjusts from 155° to 550°F. Oven interior measures 23 1/2"w x 13"h x 31 1/2"d.
- **Convection oven (VR5C):** 7 KW input. Six side mounted solid sheath heating elements. Three oven racks with five rack positions. Thermostat with cycling light adjusts from 200° to 500°F. 1/4 H.P. blower-motor. Oven interior measures 19 1/4"w x 14 1/2"h x 27"d.
- One year limited parts and labor warranty.

OPTIONS

- Stainless steel side(s).
- Without legs for masonry base - 31" working height.
- Marine features (contact factory).
- Export voltages.
- 480V, 60 Hz, 3 phase.
- Second year extended limited parts and labor warranty.

ACCESSORIES

- Additional oven racks.
- Set of four 5" diameter casters, (2 locking).
- 35" high double deck high shelf.
- VB73 elevated broiler, rated at 6 KW input.



SPECIFICATIONS:

Heavy duty electric griddle top range with oven, Vulcan-Hart Model No. VR5. Stainless steel front, sides, stub back and front top ledge. 6" adjustable stainless steel legs. 1/2" thick polished steel griddle plate. Thermostat control with cycling light per 12"w x 24"d section. Thermostat adjusts from 175° to 550°F. Porcelain on steel baffled grease drawer and warming drawer under range top. 2 1/2" fiberglass insulation in sides, top, back and bottom, with 2" in door. Requires 208 or 240 volt, 1 or 3 phase.



Exterior dimensions: 36"w x 38 1/4"d x 37"h.

NSF listed. UL listed to US and Canadian safety standards.



VR5 SERIES

HEAVY DUTY ELECTRIC GRIDDLE TOP RANGE

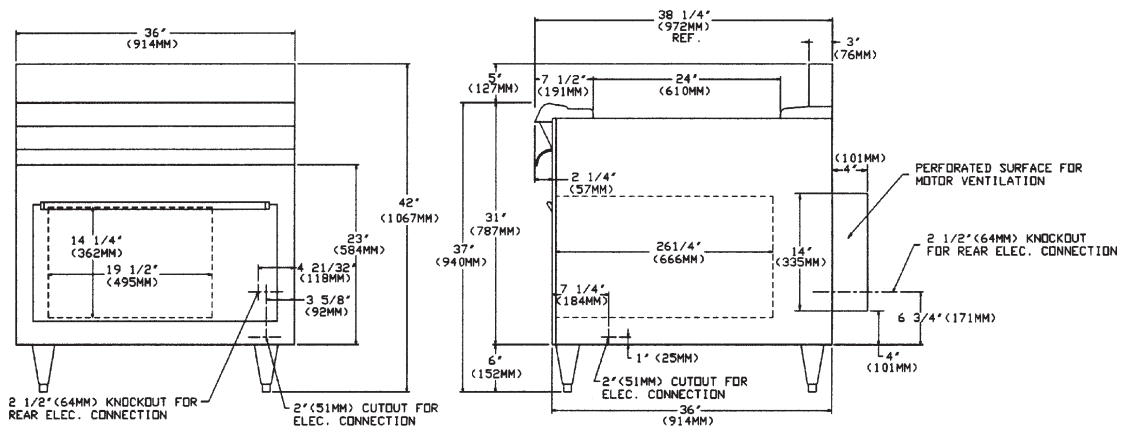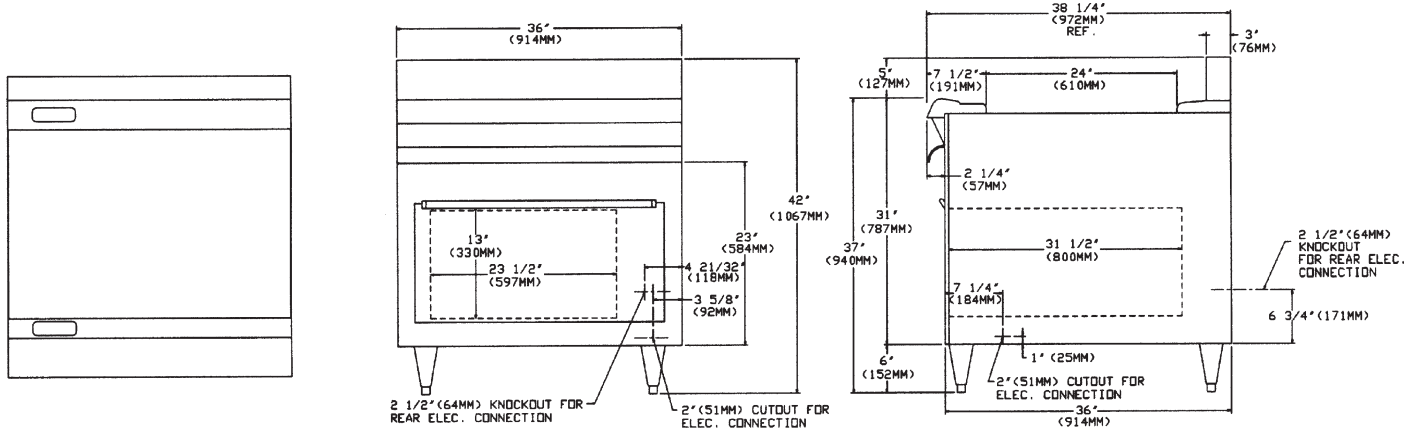

MODEL	TOTAL KW CONN.	3 PHASE LOAD KW PER PHASE			NOMINAL AMPS PER LINE WIRE											
					3 PHASE									1 PHASE		
					208V			240V			480V			208V	240V	480V
		X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	X	Y	Z	X-Z	X-Z	X-Z
VR5	21.7	7.7	5	9	70	53	58	60	46	51	30	23	25	104	90	45
VR5C	22	6.2	6.2	9.6	66	51	66	57	45	57	29	22	29	106	92	N/A

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.